


Flange Adaptor & Coupling

TECHNICAL PARAMETERS

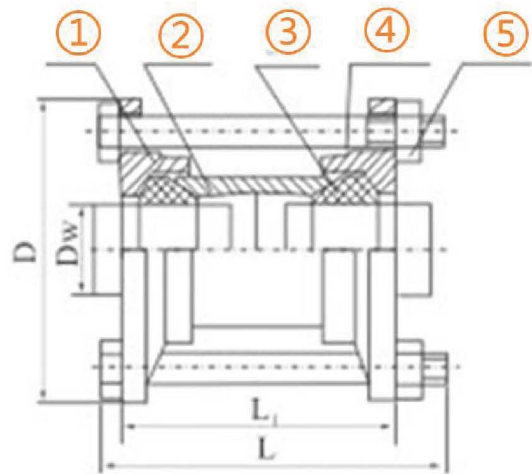

NO.	Name	Material
1	Cover	Carbon steel SS304 SS316
2	Sleeve	Carbon steel SS304 SS316
3	Gasket	NBR EPDM
4	Bolt	Carbon steel SS304 SS316
5	Nut	Carbon steel SS304 SS316

Flange Adaptor & Coupling is used for quick connection between the two pipes, and allows the pipe at both ends to freely expand and contract in the casing stroke of the Flange Adaptor & Coupling . The gland type compensation joint is a variety of water supply and drainage pipes. The disassemble and assembly of water towers, water pumps, water meters and valves provides great convenience, and it plays a very good role in long-distance pipelines due to temperature difference expansion.

MAIN DATA:

Nominal Diameter DN	External diameter Dw	external dimension		N-Th	
		Length		0.25-1.6M Pa	2.5-6.4MP a
		L1	L		
65	76	180	208	4-M12	4-M12
80	89				
100	108				
	114				
125	133				
125	140				
150	159	220	220	4-M16	6-M16
	168				
200	219				
225	245				
250	273	220	273	6-M20	8-M20
300	325				
350	355				
	377				
400	406				
	426				
450	457	220	273	10-M20	12-M20
	480				
500	508				
	530				
600	610				
600	630	220	273	750	10-M20
700	720				
800	820				
900	920				
1000	1020				
1200	1220				
1400	1420	290	355	1590	18-M24
1500	1520				
1600	1620				
1800	1820				
2000	2020				
2200	2220				
2400	2420	400	377	1795	20-M27
2600	2620				
2800	2820				
3000	3020				
3200	3220				
3400	3420				
3600	3620	400	400	2000	22-M27
3800	3820				
4000	4020				
		400	490	2200	24-M27
		400	500	2420	26-M30
		400	500	2635	28-M30
		400	500	2835	30-M30
		400	500	3030	32-M30
		400	500	3240	34-M33
		400	500	3440	36-M33
		400	500	3640	38-M33
		400	500	3860	40-M33
		400	500	4080	40-M36
		400	500	4300	42-M36

Notes:1.The size meets standard GB/T12465-2007
2.Flange Standard :Flange is available with ANSI / JIS/ BS/ GB/ GOST Standard and so on.

	Proposal/Inquiry/Order No:	NOTES:
	Customer Name:	
	Project Name:	
	Contractor:	

